

CHARACTER:

1. Physical performance

- a、 Good mechanical properties
- b、 Good resistance to high temperature, low temperature resistance
- c、 Good flame retardancy
- d、 Good corrosion resistance
- e、 Good resistance to climate
- f、 Good lubricity (small friction coefficient)
- g、 Excellent resistance to radiation
- h、 Good resistance to twists
- i、 Good resistance to cracking

2. Electrical Properties

- a、 Electrical insulation good
- b、 Has the very high resistivity

3. Processing properties

- a、 Use half extrusion processing
- b、 Good wire processing performance
- c、 In the process of wire processing good compatibility
- d、 According to UL standard design

4. Environmental protection

- a、 ROHS/REACH compliant
- b、 nonhazardous


SHOULD BE USED:

Internal Wiring of electronic gas ignitor systems.

REFERENCE:

UL758-2010、 UL1581-2009

Outline:

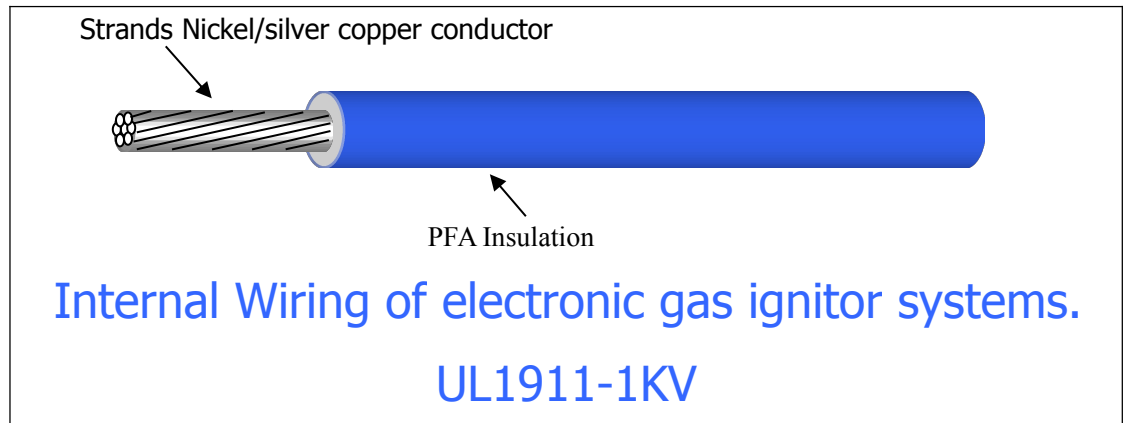

Wire structure description:
 Conductor: Nickel plating/silver copper conductor;
 Insulation materials: PFA Insulation

Internal Wiring of electronic gas ignitor systems.
 Rated temperature: 250℃ rated voltage: 1KV

STYLE	standard AWG	Conductor size (No./ mm) ±0.005mm	Conductor resistance 20℃ (Ω/Km)	Conductor Dia.(mm)	insulation thickness (mm)		Overall diameter (mm)	
					Nom.	Min.	Min	Max
1911-1KV	10	19/0.574	3.54	3.06	0.45	0.35	3.96	±0.15
	12	19/0.50	5.64	2.52	0.45	0.35	3.42	±0.15
	14	19/0.361	8.96	1.85	0.40	0.33	2.65	±0.10
	16	19/0.287	14.60	1.50	0.40	0.33	2.3	±0.10
	18	19/0.235	23.20	1.18	0.40	0.33	1.98	±0.10
	20	19/0.19	36.70	0.95	0.40	0.33	1.75	±0.10
	22	19/0.15	59.40	0.76	0.40	0.33	1.56	±0.10
	24	7/0.20	94.20	0.61	0.40	0.33	1.41	±0.10

Marking: E211048 AWM STYLE 1911 NO.AWG 250℃ 1KV PFA QIFURUI AWM I A 250℃ 1KV FT1 -LF-

SAE COLOR SERIES

* STOCK COLOR CHART				
00-BLACK	01-WHITE	02-RED	03-YELLOW	04-GREEN
05-BLUE	06-BROWN	07-GREY	08-ORANGE	09- VIOLET

PACKAGE

*PACKAGE				
Part No.	Packing- FT/roll			3F
10AWG	■ 500Ft	□ 1000Ft	□ 2000Ft	
12~20AWG	□ 500Ft	■ 1000Ft	□ 2000Ft	
22-30AWG	□ 500Ft	□ 1000Ft	■ 2000Ft	

According to customer requirements for packaging packaging